

Product Description


Product Feature

PTFE tubing is heat and chemical resistant and meets the industry requirements of the Food Sanitation Law. Flame resistant(Equivalent to UL-94 Standard V-0).

The denatured PTFE fluorine resin tubing was developed to realize high flexibility while maintaining the same heat and chemical resistance as the series FEP/PFA.

Symbol


Ordering Code Fluoropolymer Tube

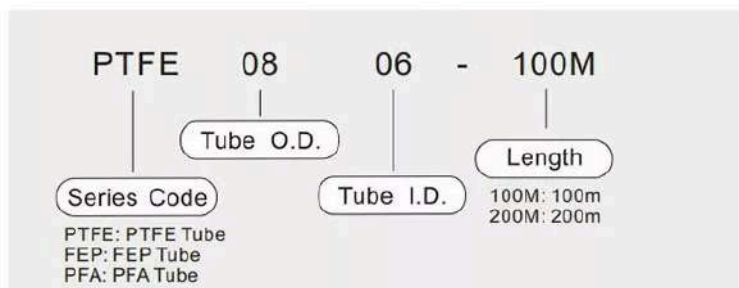

Product Specifications

Model	PTFE	FEP	PF
Material	Polytetrafluoroethylene resin	Fluorinated ethylene propylene resin	Tetrafluoroethylene vinyl ether c
Fluid admitted	Air, Inert gas, Water		
Environment and fluid temperature	-65°C to 260°C, 0 to 100°C (Water, No freezing)	-65°C to 200°C, 0 to 100°C (Water, No freezing)	-65°C to 260°C (Water, No

Main Dimensions

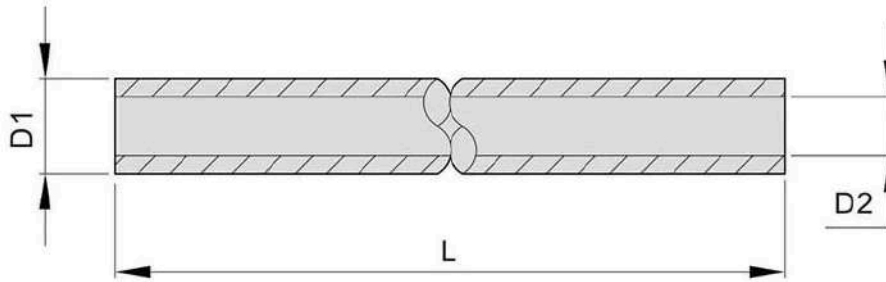

Model	D1 (mm)	D2 (mm)	Max. Working Pressure at 20°C (bar)	Length (m/roll)
PTFE0425	4	2.5	16	200
PTFE0604	6	4	14	200
PTFE0804	8	6	9	100
PTFE1075	10	7.5	9	100
PTFE1209	12	9	9	100
FEP0402	4	2	23	200
FEP0604	6	4	15	200
FEP0806	8	6	10	100
FEP1008	10	8	7	100
FEP1209	12	9	10	100
FEP1210	12	10	7	100
PFA0425	4	2.5	17	200
PFA0604	6	4	15	200
PFA0806	8	6	10	100
PFA1008	10	8	7	100
PFA1210	12	10	6	100

Note: Other sizes can be offered, please contact with us.