


Z2DS6 型叠加式单向阀

Z2DS6 SERIES PILOT CONTROLLED MODULAR CHECK VALVES




符号 SYMBOL

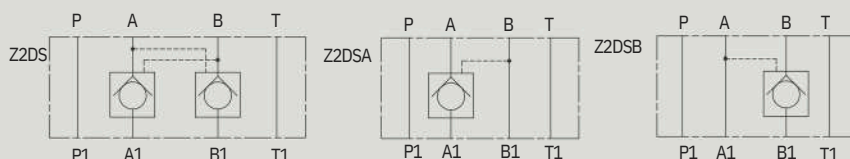

Z2DS6 型单向阀是叠加式液控单向阀，它可用于关闭一个或两个 pilot operated style sandwich valves. These valves used 工作油口且无泄漏持续工作长时间，稳定性好。 to close one or two actuator ports.

▶ 技术参数 Technical data

通径 Size	6
工作压力(MPa) Operating pressure (MPa)	31.5
流量(L/min) Flow rate (L/min)	50
介质温度范围 (°C) Fluid temperature range (°C)	-30 ~ 80°C
重量(千克) Weight(KGS)	1
阀体(材料)表面处理 Valve body (Material) Surface treatment	铸件 表面磷化处理 casting phosphating surface treatment
油液清洁度/Oil cleanliness	NAS1638 9级和ISO440620/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

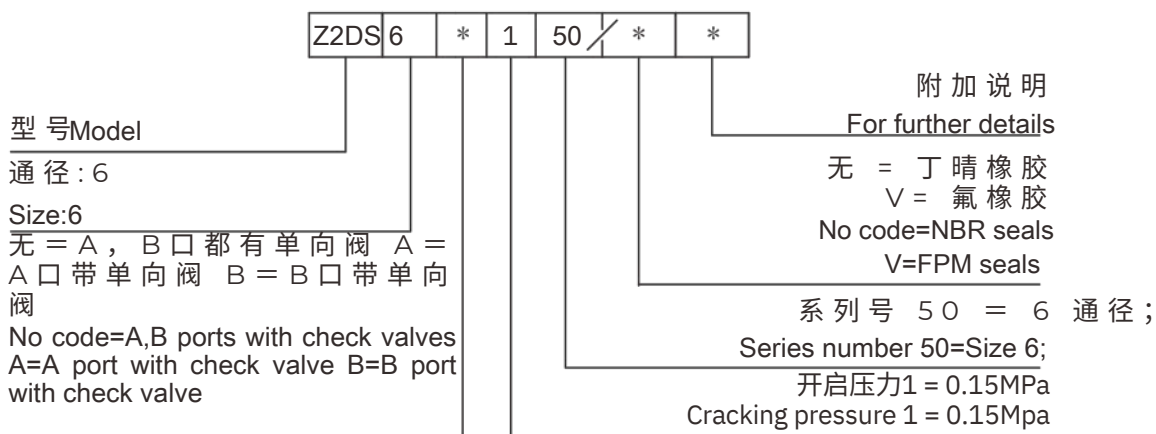

▶ Z2DS6外形尺寸和安装 Z2DS6 External Dimensions and Fittings

