



Z2FDS 型叠加式双单向节流阀 Z2FDS SERIES DOUBLE THROTTLE CHECK VALVES

符号 SYMBOL



Z2FDS/S



Z2FDS/S2



Z2FDS 型叠加式双单向节流阀通过改变节流口断面大小来调节油路流量，从而实现流量控制，在反向时，液压油直接通过单向阀回油。

Z2FDS series double throttle/check valves are used to restrict flow in one direction while allowing free-flow in the opposite direction as check valves.

技术参数 Technical data

通径 Size	6	10	16	22
工作压力(MPa) Operating pressure (MPa)	31.5	31.5	31.5	31.5
流量(L/min) Flow rate (L/min)	80	160	250	350
介质温度范围 (°C) Fluid temperature range (°C)	0~80	0~80	0~80	0~80
重量(千克) Weight(KGS)	1	2.2	4.7	8
阀体(材料)表面处理 Valve body (Material) Surface treatment	铸件 表面磷化处理 casting phosphating surface treatment			
油液清洁度/Oil cleanliness	NAS1638 9级和ISO440620/18/15级 NAS1638 class 9 and ISO4406 class 20/18			

Z2FDS 6 30 / S V *

型号

Model

通径: 6; 10; 16; 22

Size: 6,10,16,22

系列号 30 = 通径 6、16、22; 20 = 通径 10

Series number 30=Size 6,16,22; 20=Size10

附加说明

For further details

无 = 丁晴橡胶

V = 氟橡胶


No code=NBR seals for petroleum oils

V=FPM seals for phosphate ester


S = 进口节流; S2 = 出口节流

S=Meter-in control; S2=Meter-out control


► Z2FDS6外形尺寸和安装 Z2FDS6 External Dimensions and Fittings

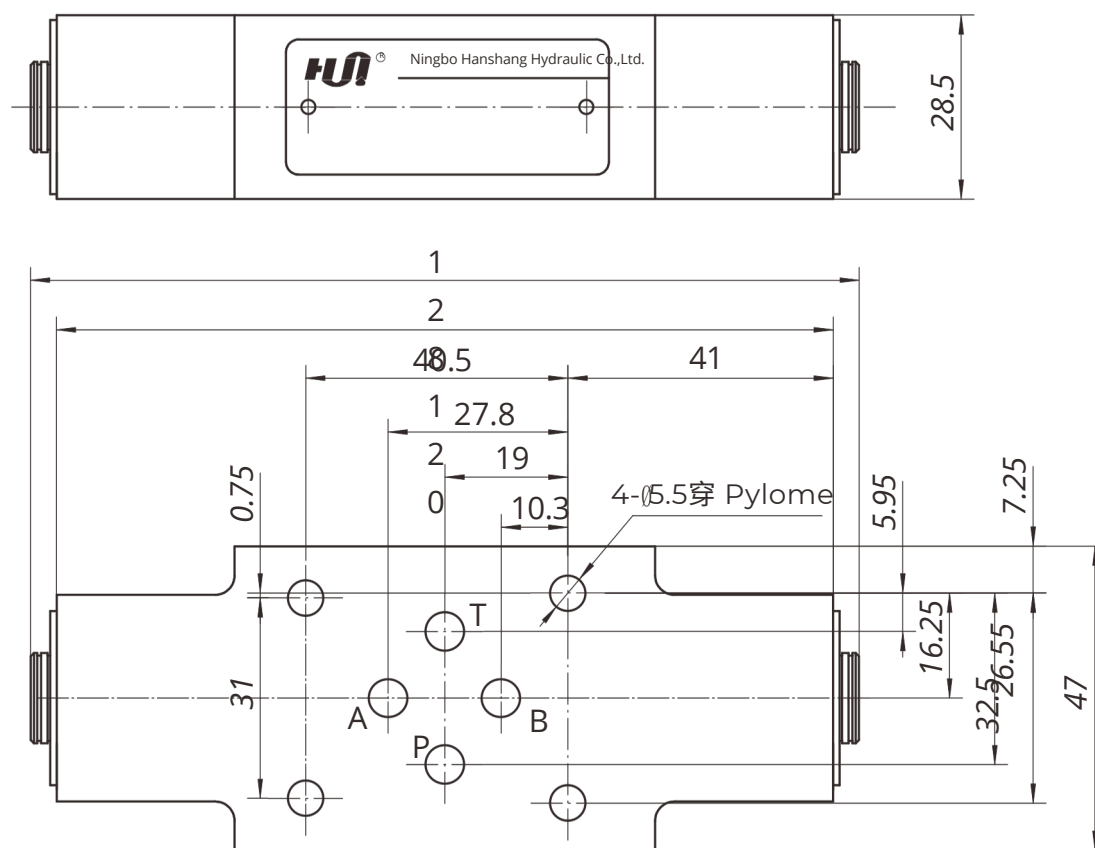

► Z2FDS10外形尺寸和安装 Z2FDS10 External Dimensions and Fittings

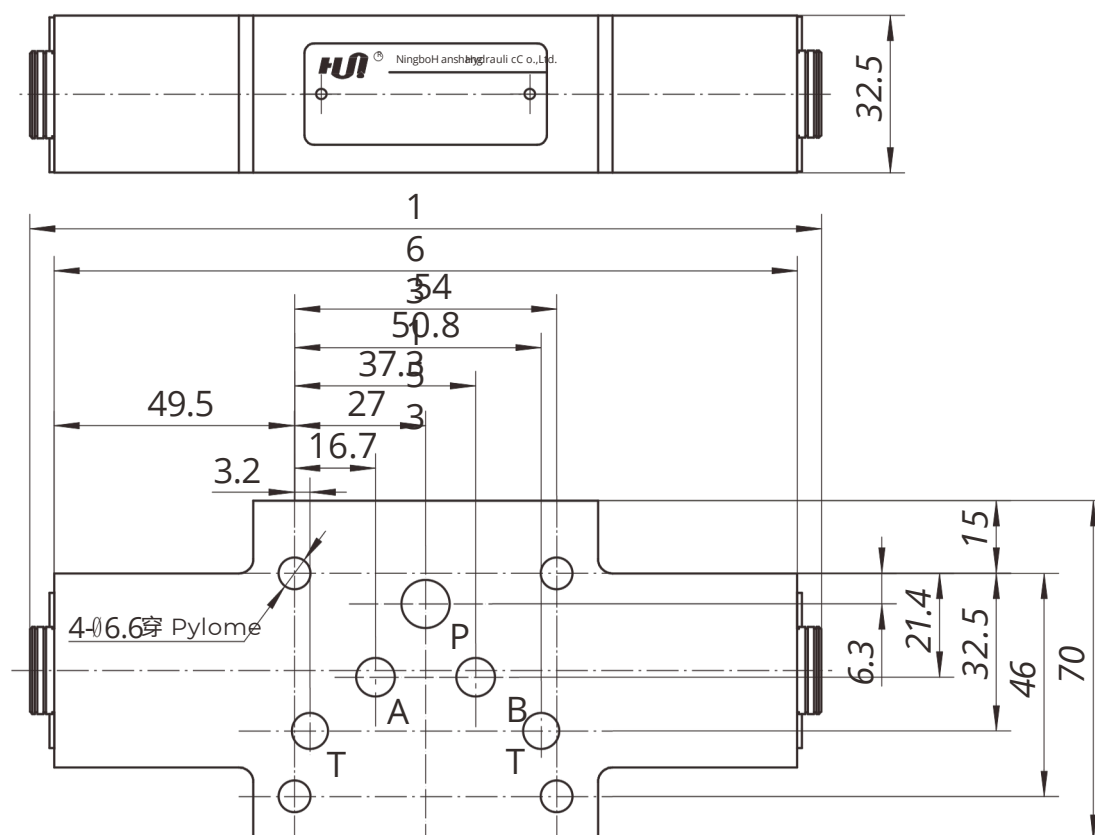

► Z2FDS16外形尺寸和安装 Z2FDS16 External Dimensions and Fittings

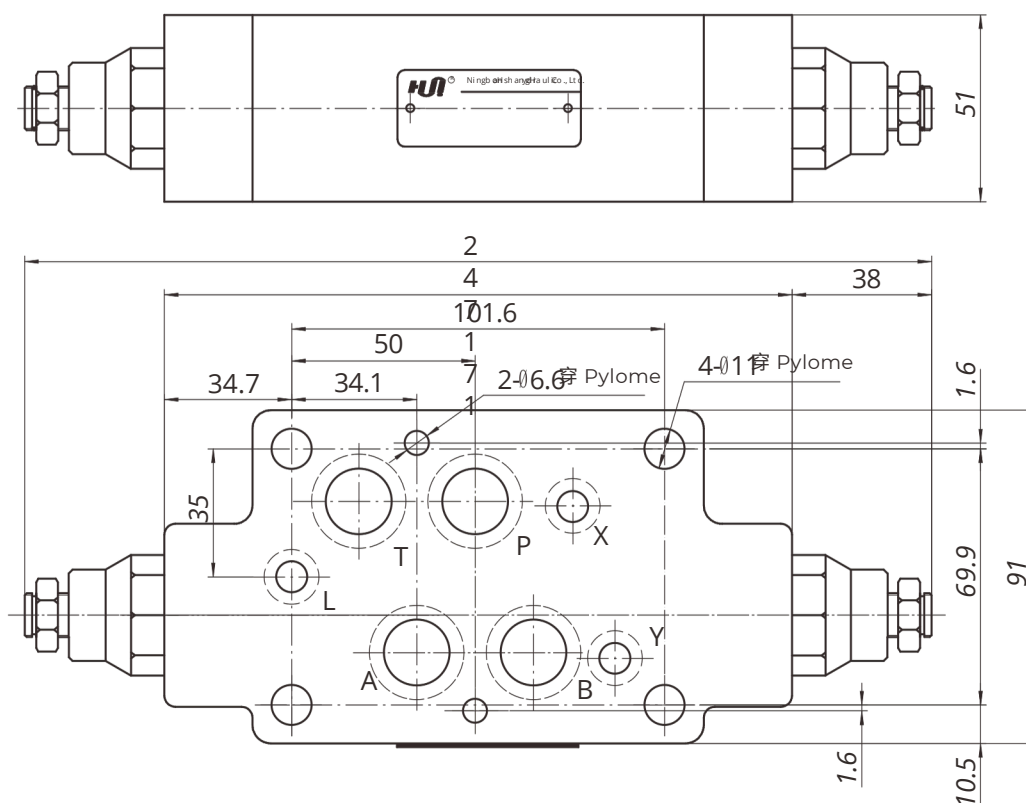

► Z2FDS22外形尺寸和安装 Z2FDS22 External Dimensions and Fittings

