


ZPB6型叠加式溢流阀

ZPB6 SERIES MODULAR RELIEF VALVES

符号 SYMBOL

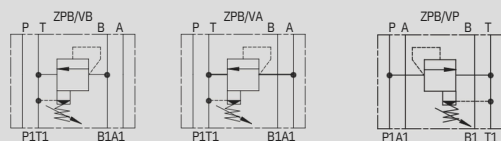

ZPB 型压力控制阀是叠加板结构的先导式溢流阀。

Pressure relief valves of ZPB series are pilot operated style modular valves.

▶ 技术参数 Technical data

通径 Size	6
工作压力(MPa) Operating pressure (MPa)	31.5
流量(L/min) Flow rate (L/min)	60
油温范围(°C) Oil temperature range(°C)	-20~ 70
重量(千克) Weight(KGS)	ZPB 1.3
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	铸件 表面磷化处理 casting phosphating surface
油液清洁度/Oil cleanliness	NAS1638 9级和ISO440620/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

叠加式
Modular type

型号
Model

通径:6
Size:6

溢流方向 Relief from
VA:A→T
VB:B→T
VP:P→T

附加说明
For further details

无 = 丁晴橡胶
V= 氟橡胶
No code=N BRseals for petroleum oils
V=FPM seals for phosphate ester

Pressure range 压力等级
50 = 5Mpa
100 = 10Mpa
200 = 20Mpa
315 = 31.5Mpa

系列号
Series number

1=手柄
1= handwheel

Technical drawing of the HSH-100 hydraulic pump, showing front and top views with dimensions.

Front View (Top):

- Overall width: 154
- Overall height: 40
- Mounting flange diameter: 40.5
- Flange thickness: 27.8
- Flange hole diameter: 19
- Flange hole spacing: 10.3
- Flange hole diameter: 13.8
- Flange hole diameter: 5.95
- Flange hole spacing: 16.25
- Flange hole diameter: 26.55
- Flange hole spacing: 32.5
- Flange hole diameter: 44.5

Top View (Bottom):

- Overall width: 154
- Overall height: 40
- Mounting flange diameter: 40.5
- Flange thickness: 27.8
- Flange hole diameter: 19
- Flange hole spacing: 10.3
- Flange hole diameter: 13.8
- Flange hole diameter: 5.95
- Flange hole spacing: 16.25
- Flange hole diameter: 26.55
- Flange hole spacing: 32.5
- Flange hole diameter: 44.5

Dimensions:

- 4-5.5穿 Pylome
- 0.75
- 31
- 98
- 40.5
- 27.8
- 19
- 10.3
- 13.8
- 5.95
- 16.25
- 26.55
- 32.5
- 44.5

Labels:

- A
- B
- P
- T

Logo and Text:

- HSH
- Ningbo Hanshang Hydraulic Co., Ltd.

[illegible]