


## Z2DS10 型叠加式单向阀

### Z2DS10 SERIES PILOT CONTROLLED MODULAR CHECK VALVES




#### 符号 SYMBOL

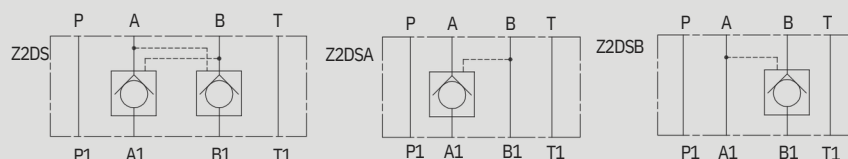

Z2DS10 型单向阀是叠加式液控单向阀，它可用于关闭一个或两个工作油口且无泄漏持续工作时间长，稳定性好。  
Z2DS10 series are pilot operated style sandwich valves. These valves are used to close one or two actuator ports.

#### ▶ 技术参数 Technical data

|                                                         |                                                                           |
|---------------------------------------------------------|---------------------------------------------------------------------------|
| 通径 Size                                                 | 10                                                                        |
| 工作压力(MPa) Operating pressure (MPa)                      | 31.5                                                                      |
| 流量(L/min) Flow rate (L/min)                             | 80                                                                        |
| 介质温度范围 (°C) Fluid temperature range (°C)                | -30 ~ 80 °C                                                               |
| 重量(千克) Weight(KGS)                                      | 2.2                                                                       |
| 阀体 (材料) 表面处理<br>Valve body (Material) Surface treatment | 铸件 表面磷化处理 casting phosphating surface                                     |
| 油液清洁度/Oil cleanliness                                   | NAS1638 9级和ISO440620/18/15级<br>NAS1638 class 9 and ISO4406 class 20/18/15 |

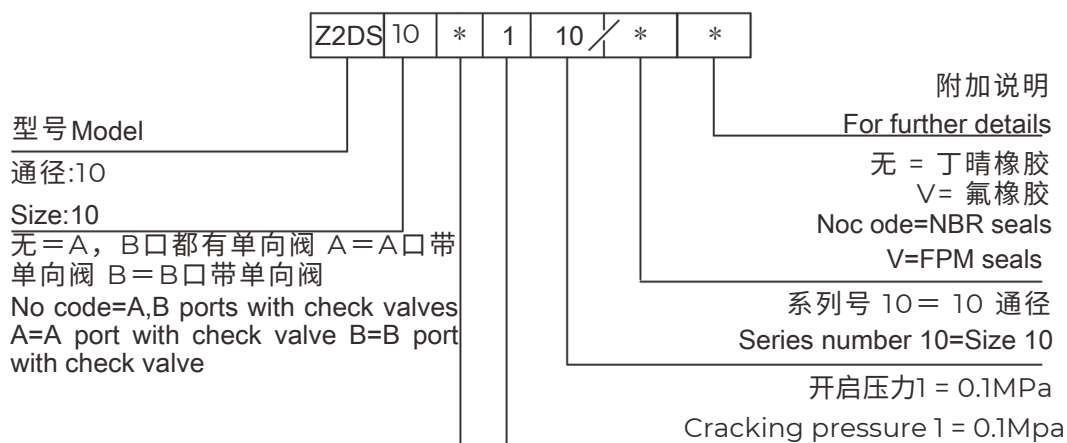

► Z2DS10外形尺寸和安装 Z2DS10 External Dimensions and Fittings

