


Z2PB6 型叠加式溢流阀

Z2PB6 SERIES MODULAR RELIEF VALVES

符号 SYMBOL

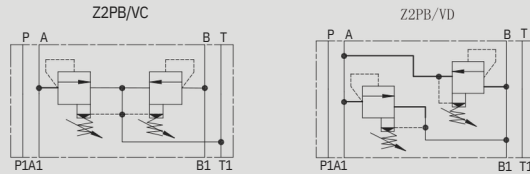

Z2PB6 型压力控制阀是叠加板结构的先导式溢流阀。

Pressure relief valves of Z2PB6 series are pilot operated style modular valves.

▶ 技术参数 Technical data

通径 Size	6
工作压力(MPa) Operating pressure (MPa)	31.5
流量(L/min) Flow rate (L/min)	60
油温范围(°C) Oil temperature range(°C)	-20 ~ 70
重量(千克) Weight(KGS)	1.9
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	铸件 表面磷化处理 casting phosphating surface
油液清洁度/Oil cleanliness	NAS1638 9级和ISO440620/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

叠加式
Modular type

2=双溢流阀 (只有 VC,VD)
2=Two relief cartridges
(Only for VC,VD)

型号
Model

通径:6
Size:6

溢流方向 Relief from
VC:A→T B→T
VD:A→B B→A

附加说明
For further details

无 = 丁晴橡胶
V = 氟橡胶
No code = NBR seals for petroleum oils
V = FPM seals for phosphate ester

Pressure range 压力等级
50 = 5Mpa
100 = 10Mpa
200 = 20Mpa
315 = 31.5Mpa

系列号
Series number

1=手柄
1=handwheel

► Z2PB6VC VD外形尺寸和安装 Z2PB6VC VD External Dimensions and Fitting

